




Eclipse is available as direct light or as up down light and illuminated with thermally cool LED modules keeping the frame well below the temperatures of other similar products. Our LED modules are available in 3000k, 3500k and 4000K.


Refer to the sheet that follows for ordering information.


POWDER COAT FINISHES AVAILABLE



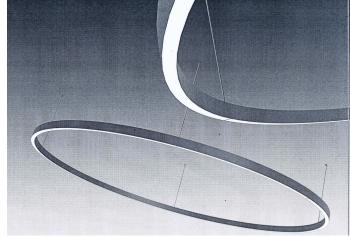

ECL-96-D-GR21-450-3500-RM

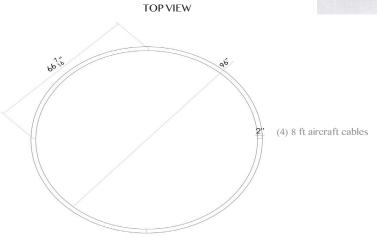

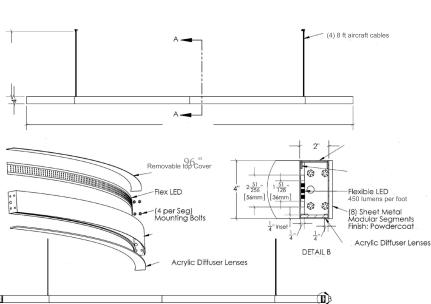

Construction:

Formed Aluminum , powder coated to desired finish.

Suports:

(4) 8 ft lengths stainless steel aircraft cables **Illumination**:

Thermally cool running LED module 80CRI 450 lumens per linear foot; 11300 lumens.

Emmission:

Can be ordered as either a direct down light or an combination of up and down light

Drivers:

Class 2 LED drivers located in either surface mouned canopies or as remote drivers above ceiling . Driver enclosures are supplied when remoting drivers in the ceiling. Drivers are universal $120\text{-}277\,\text{V}$, $0\text{-}10\,\text{V}$ dimming

Lens

White acrylic

Finish

Any of the finishes provided in this brochure. Custom finishes available on request

Other Sizes Available Listed below

ECL-48 (48" diameter)

ELC-72 (72 " diameter)

ECL-120 (120" diameter)

ECL-144 (144" diameter)

ECL-168 (168" diameter)

Certification

UL listed LED

Model	Size	Direction	Finish	Lumen Output	LED Color	Driver Location
ECL	48 72 96 120 144 168	D- Direct Down IND- Up Down	BL05 GN13 GR21 RD01 GLBLK OG01 YL01 YL14 WHTGL	450 (450 lm /ft) 900 (900 lm/ft)	3000k 3500k 4000k	SF(Surface) RM (Remote)