

RADIANCE HORIZONTAL

Description:

Horizontally suspended linear pendant wired individually to its own canopy, supported on one end with a power feed cable and the other end with aircraft cable. The LED modules that illuminate this fixture run the full length of the tube and provide a 360 degree omni-directional illumination.

Sizes:

- RADH-A: 26" L x 3.25" W
- RADH-B: 48" L x 3.25" W
- RADH-C: 62" L x 3.25" W

Metal finish options:

- BN: Brushed nickel
- BZ: Powder coated bronze
- BLK: Powder coated satin black
- AS: Powder coated silver

Driver:

120-277V input with 0-10 V dimming

Driver location:

- CSF: In surface mounted canopy
- RM: Remotely located above ceiling in NEMA enclosure

Delivered lumens at 4000K 80 CRI

- RADH-A: 1533 lm
- RADH-B: 3080 lm
- RADH-C: 3566 lm



Support:


8 feet of stainless steel aircraft cable and 10 feet of clear power feed cord.

Listing:

UL listed LED indoor

Component replacement:

Field replaceable

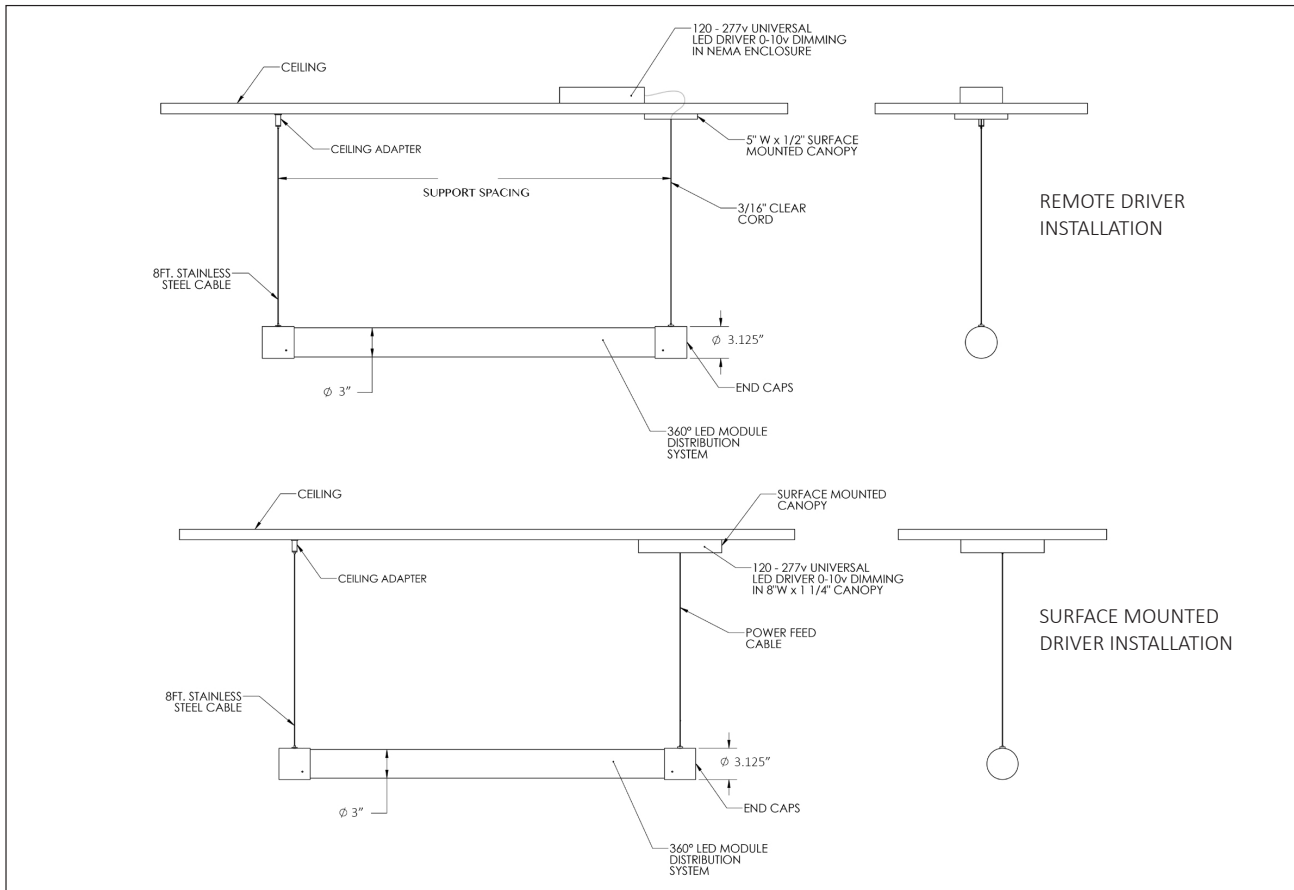

Model	Size	Finish	LED System	Driver	Color Temp	Wattage
RAD-H	A	AS	LPPD8-450	CSF	3000	16
	B	BZ	LPPD8-900	RM	3500	32
	C	BLK	LPPD9-1050		4000	37
		BN				