

### EUGLOW Collection

PART NUMBER:

TYPE:

JOB NAME:

### ORDERING INFORMATION

#### 1 MODEL\* & SIZE

- ☐ **EU1016-24** 24" Diameter  
☐ **EU1016-30** 28" Diameter

#### 2 COLOR TEMP.

- ☐ **3000** 3000K  
☐ **3500** 3500K  
☐ **4000** 4000K

#### 3 CRI

- ☐ **80** 80 CRI  
(Standard)  
☐ **90**

#### 4 WATTAGE

- ☐ **34** 34Watts  
☐ **67** 67 Watts

#### 5 VOLTAGE

- ☐ **UNV** 120-277V (0-10V Dimming)

#### 6 MOUNTING OPTIONS

- ☐ **CPC/DM/08 8"** Canopy with Driver, Cable mounted to center canopy  
☐ **STM-CPC/DM/08 8"** Canopy with Driver, Stem and Cable mounted to canopy  
☐ **CPC/RM/08 8"** Canopy with Remote Driver, Cable mounted to center canopy  
☐ **VS/RM/06 6"** Canopy with Remote Driver, Vertical Cable mounted to Ceiling

#### 7 INSIDE ACRYLIC 8 OUTSIDE ACRYLIC 9 PAINT FINISH

- ☐ **WA** White  
☐ **BLUE** Blue  
☐ **GREEN** Green  
☐ **Orange** Orange  
☐ **MAROON** Maroon  
☐ **YELLOW** Yellow  
☐ **PURPLE** Purple  
☐ **SANDY** Sandy  
☐ **BLACK** Black  
☐ **GOLD** Gold  
☐ **TEAL** Teal

- ☐ **WA** White  
☐ **BLUE** Blue  
☐ **GREEN** Green  
☐ **Orange** Orange  
☐ **MAROON** Maroon  
☐ **YELLOW** Yellow  
☐ **PURPLE** Purple  
☐ **SANDY** Sandy  
☐ **BLACK** Black  
☐ **GOLD** Gold  
☐ **TEAL** Teal


- ☐ **BKG** Gloss Black  
☐ **BKS** Satin Black  
☐ **BRZ** Bronze  
☐ **WHG** Gloss White  
☐ **WHS** Satin White  
☐ **BLU** Blue  
☐ **GRN** Green  
☐ **GDS** Satin Gold  
☐ **CRD** Cardinal Red  
☐ **SLV** Silver  
☐ **RAL** RAL\_\_\_\_\_  
☐ **CUSTOM** Custom color



### SPECIFICATIONS

<b>SIZES:</b>	26"W x 8"H 32"W x 8"H
<b>CONSTRUCTION:</b>	Acrylic square shade mounted to rigid metal cover and suspended to Canopy. LED driver is mounted in canopy or can be remote mounted in enclosure. Covers, stem and canopy finished in durable powder coated finish.
<b>DIFFUSERS:</b>	Precision formed acrylic drums eliminates any LED pixelation and provides smooth symmetric distribution. Optional perimeter acrylic colors are available. Please consult factory for additional color options.
<b>MOUNTING CONFIGURATIONS:</b>	Available configurations are provided with (4) griplock cables and can be specified to mount to the Center Canopy or vertical suspension to the ceiling. 60" sizes requires center stem and (4) griplock cables. This option can also be used for smaller sizes.
<b>DRIVERS:</b>	LED drivers are 120-277V and 0-10V dimming. Drivers are direct mounted in the canopy or optional remote mounted (RM) driver in enclosure.
<b>LED:</b>	LED's are mounted to metal surface to maximize heat dissipation. Available in 3000, 3500 or 4000K. Standard 80CRI, 90CRI optional.
<b>ILLUMINATION:</b>	26" Square: 2,483 lumens at 36W 32" Square: 4,965 lumens at 56W  For other outputs and configurations, please consult factory
<b>FINISHES:</b>	Powder coated finish applied to housing and canopies. Available in a variety of powder coated finishes.
<b>FABRICATION:</b>	Fabricated and assembled in the US.
<b>LISTINGS:</b>	UL listed for dry or damp indoor locations.
<b>WARRANTY:</b>	5 year limited warranty on LED and electronic parts. Consult terms and conditions for full details.

### RENDERINGS AND DIMENSIONS

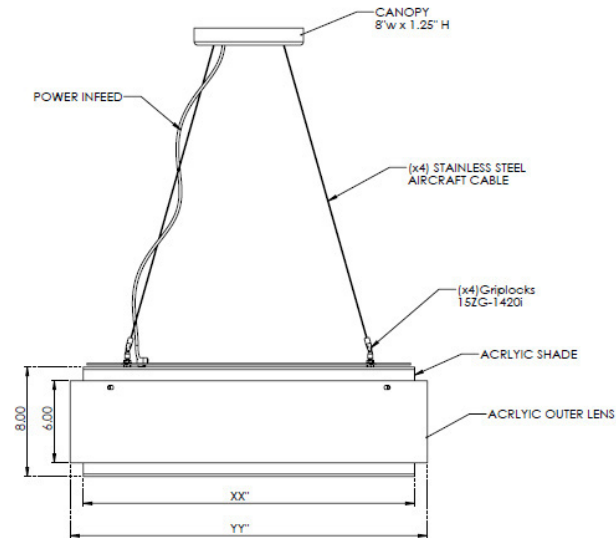

## ACRYLIC COLOR OPTIONS



## METAL COLOR OPTIONS

