

RADIANCE

Description:

Vertical pendant suspended individually from its own canopy. Our LED modules run the full length of each acrylic cylinder and provide uninterrupted 360 degree illumination throughout each tube. Unless specified with a bottom cap (BC) our acrylic tubes are capped off on the bottom end with a white acrylic bottom and accented with a small nickel cap.

Sizes:

- RAD-S: 15" L x 3.25" W**
- RAD-A: 26" L x 3.25" W
- RAD-B: 48" L x 3.25" W
- RAD-C: 62" L x 3.25" W

Metal finish options:

- AS: Powder coated anodized silver
- BZ: Powder coated bronze
- BLK: Powder coated satin black
- BN: Brushed nickel

Delivered lumens at 4000K 80 CRI

- RAD-S: 905
- RAD-A: 1810
- RAD-B: 3620
- RAD-C: 4525

Driver:

Universal 120-277 input, with 0-10 V dimming

Mounting:

- RM: located remotely above ceiling in NEMA enclosure
- CSF: located in surface mounted canopy
- VS-MULTP: To mount on a multi-point canopy

Monopoint canopy sizes"

- RM: 5" W x 1/2" H
- CSF: 8" W x 1.5" H

Support:

8 feet of 3/64" stainless steel cable

Power feed:

8 feet of power feed cord

Component replacement:

Field replaceable

Listing:

UL listed LED indoor

Fabrication:


Radiance is fabricated in the U.S

.Warranty:

Electronic manufacturer's extended 5 year limited



RAD-A WITH BOTTOM CAP

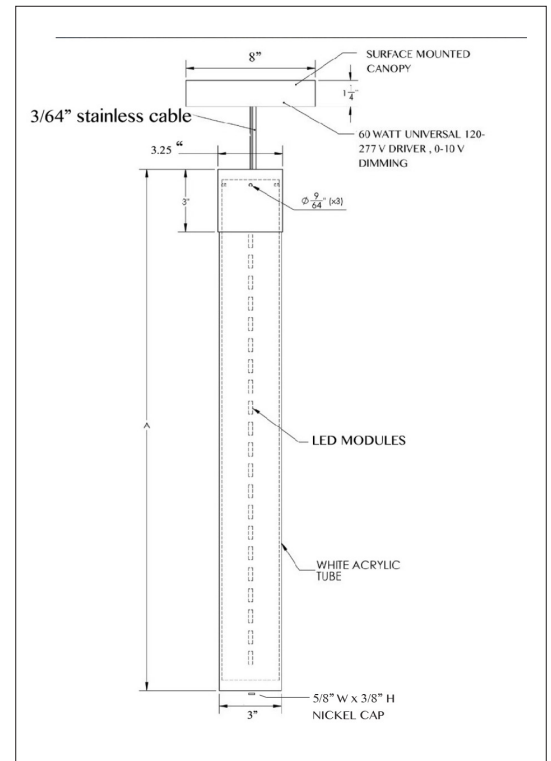

RAD-A NO BOTTOM CAP

ORDER KEY

NOTE: PART NUMBERS FOR EACH SIZE TO BE READ ACROSS ONLY SIZE A AS AN EXAMPLE IS AVAILABLE ONLY IN 18 WATTS

Model	LED System	Metal Finish	Driver Location	Mounting	Optional botom cap	LED Color	Delivered Lumens	Wattage
RAD-S	Lppd6-250	AA		VS-RM-CBL			905	9
RAD-A	Lppd8-500	ST-BL	RM		BC	2700	1810	18
RAD-B	Lppd9-1000	BZ	remote	VS-CSF-CBL	Add BC for optional bottom cap	3000	3620	32
RAD-C	Lppd9-1200	BN	in NEMA enclosure	VS-MULTP		3500	4525	45
			in canopy			4000		