

# EUGLOW Collection



# **EU1009** Round Drum Pendant

	PART NOMBER.	
	TYPE:	JOB NAME:
ORDE	RING INFORMATIO	N
ORDERING IN ORIMATION		
1 MOD	EL* & SIZE	2 COLOR TEMP.
EU100	9-24 24" Diameter 19-30 30" Diameter 19-36 36" Diameter 19-42 42" Diameter 19-60 60" Diameter	<ul><li>3000 3000К</li><li>3500 3500К</li><li>4000 4000К</li></ul>
3 CRI		4 WATTAGE
□ <b>80</b> 80 0 (Stand □ <b>90</b>	<del> </del>	<ul><li>☐ 36 36 Watts</li><li>☐ 56 56Watts</li><li>☐ 65 65Watts</li></ul>
5 VOLTAGE  UNV 120-277V (0-10V Dimming)		
6 MOUNTING OPTIONS		
CPC/DM/08 8" Canopy with Driver, Cable mounted to center canopy  STM-CPC/DM/08 8" Canopy with Driver, Stem and Cable mounted to center canopy  CPC/RM/08 8" Canopy with Remote Driver, Cable mounted to center canopy  VS/RM/06 6" Canopy with Remote Driver, Vertical Cable mounted to Ceiling		
7 COLO	OR CODE	
□ BKG □ BKS	Gloss Black Satin Black Bronze	
WHG WHS	Gloss White Satin White Blue	
GRN	Green	
GDSSatin Gold		
CRD	Cardinal Red	
SLV	Silver	
RAL CUS	RALCUSTOM	



## **EU1009**

### **Round Drum Pendant**

#### **SPECIFICATIONS**

SIZES: 24"W x 8"H

> 30"W x 8"H 36"W x 8"H 42"W x 10"H 60"W x 10"H

Acrlic drum shade mounted to rigid metal cover and **CONSTRUCTION:** 

suspended to Canopy. LED driver is mounted in canopy or can be remote mounted in enclosure. Covers, stem and canopy finished in durable powder coated finish.

Precision formed acrylic drum eliminates any LED **DIFFUSERS:** 

> pixelation and provides smooth symmetric distribution. Optional perimeter acrylic colors are available. Please

consult factory for options.

Available configurations are provided with (4) griplock **MOUNTING** cables and can be specified to mount to the Center **CONFIGURATIONS:** 

Canopy or vertical suspension to the ceiling. 60" sizes requires center stem and (4) griplock cables. This option

can also be used for smaller sizes.

LED drivers are 120-277V and 0-10V dimming. Drivers are **DRIVERS:** 

direct mounted in the canopy or optional remote

mounted (RM) driver in enclosure.

LED's are mounted to metal surface to maximize heat LED:

dissipation. Available in 3000, 3500 or 4000K.

Standard 80CRI, 90CRI optional.

24" Drum: 2,483 lumens at 36W **ILLUMINATION:** 

30" Drum: 4,965 lumens at 56W 36" Drum: 4.965 lumens at 56W 42" Drum: 4.965 lumens at 56W 60" Drum: 6,268 lumens at 65W

For other outputs and configurations, please consult facto

Powder coated finish applied to housing and canopies. **FINISHES:** 

Available in a variety of powder coated finishes.


Fabricated and assembled in the US. **FABRICATION:** 


UL listed for dry or damp indoor locations. **LISTINGS:** 


5 year limited warranty on LED and electronic parts. **WARRANTY:** 

Consult terms and conditions for full details.

#### **RENDERINGS AND DIMENSIONS**










# **EU1009**Round Drum Pendant

### **ACRYLIC COLOR OPTIONS**

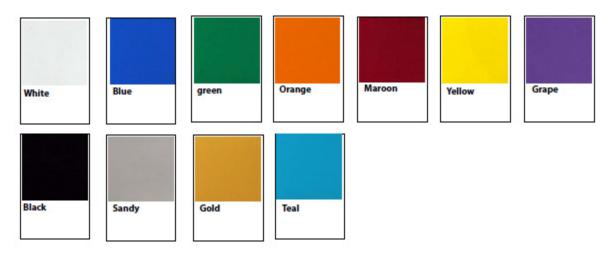

### **METAL COLOR OPTIONS**

