

PART NUMBER:

TYPE: JOB NAME:

ORDERING INFORMATION



1 MODEL & SIZE

- EOS24** 24" Diameter
- EOS36** 36" Diameter
- EOS48** 48" Diameter
- EOS60** 60" Diameter
- EOS72** 72" Diameter
- EOS84** 84" Diameter
- EOS96** 96" Diameter
- EOS120** 120" Diameter
- EOS144** 144" Diameter

2 COLOR TEMP.

- 2700** 2700K
- 3000** 3000K
- 3500** 3500K
- 4000** 4000K

3 COLOR RENDERING

- 80 CRI (Standard)
- 90** 90 CRI

4 LUMEN OUTPUT

- 450** 450 Designed Lumens/ft
- 900** 900 Designed Lumens/ft
- CUS** Custom Output (consult factory)

5 VOLTAGE

- UNV** 120-277V (0-10V Dimming)

6 MOUNTING

- CPC/DM/09** 9" Canopy with Driver, Vertical Suspension
- CPC/RM/08** 8" Canopy with Remote Driver, Vertical Suspension
- VS/DM/09** 9" Canopy with Driver, Vertical Suspension
- VS/RM/06** 6" Canopy with Remote Driver, Vertical Suspension

7 OUTSIDE ACRYLIC

(Blank) Standard Acrylic

- MA** Matte White
- BLUE** Blue
- GREEN** Green
- ORANGE** Orange
- MAROON** Maroon
- YELLOW** Yellow
- PURPLE** Purple
- BLACK** Black
- GOLD** Gold
- TEAL** Teal
- CUS** CUSTOM



8 COLOR CODE

- BKG** Gloss Black
- BKS** Satin Black
- BRZ** Bronze
- WHG** Gloss White
- WHS** Satin White
- BLU** Blue
- GRN** Green
- GDS** Satin Gold
- CRD** Cardinal Red
- SLV** Silver
- RAL** RAL_____
- CUS** CUSTOM

SPECIFICATIONS

- SIZES:** 6" W x 8"H
24-144" Diameter. Custom sizes available.
- CONSTRUCTION:** Highly durable and cleanable acrylic. Unless otherwise specified EOS is fabricated in white acrylic with no decorative perimeter accent. Center section can be custom made with different acrylic colors.. Sizes over 60" are shipped modular to assemble in the field.
- Distributions:** Diffuse lens provides an even direct/indirect illumination.
- DIFFUSERS:** Precision cut acrylic lens eliminates any LED pixelation and provides smooth symmetric distribution. Outside Acrylic can be ordered in optional colors. Consult factory for additional options
- MOUNTING CONFIGURATIONS:** Cables can be centered pitched to canopy (CPC) or vertically suspended (VS). Sizes above 48" require (VS) option.
- SUPPORTS:** All fixtures supplied standard with 8 feet stainless steel cables. Additional cable lengths available on request. *Adequate ceiling support required at aircraft cable mounting points. Request installation guide specific to the size and illumination for each fixture upon ordering to identify mounting support points.*
- DRIVERS:** LED drivers are 120-277V and 0-10V dimming. Drivers are directed mounted in the canopy or optional remote mounted (RM) driver in enclosure. Larger ring sizes may require additional drivers.
- LED:** LED's are mounted to metal surface to maximize heat dissipation. Available in 2700, 3000, 3500 or 4000K. Standard 80CRI, 90CRI optional.
- ILLUMINATION:** Available in 450 or 900 designed lumens/ft. Output can be customized by consulting factory.
- FINISHES:** Powder coated finish applied to housing and canopies. Available in a variety of powder coated finishes.
- FABRICATION:** Fabricated and assembled in the US.
- LISTINGS:** UL listed for dry or damp indoor locations.
- WARRANTY:** 5 year limited warranty on LED and electronic parts. Consult terms and conditions for full details.

RENDERINGS AND DIMENSIONS

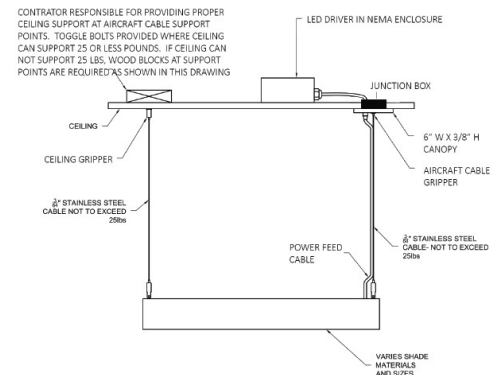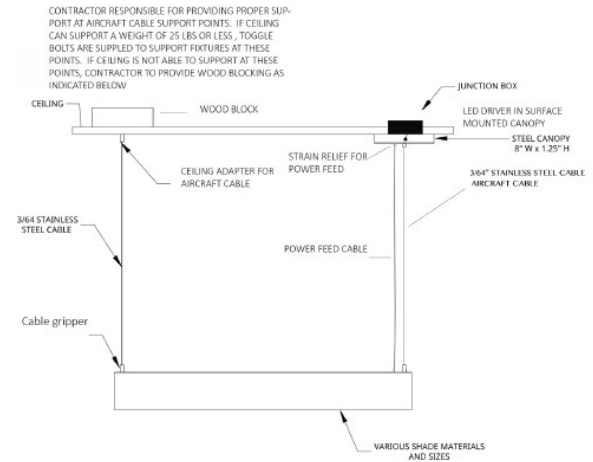

ACRYLIC COLOR OPTIONS



METAL COLOR OPTIONS

